

TOTEBOARD



Function

The TOTEBOARD Keyboard is a wireless, small-footprint keyboard that transmits keystrokes via infrared light transmission to the TOTEBOARD Receiver. The Receiver connects by cable to an IBM PC or compatible computer at either the keyboard jack or serial port. The TOTEBOARD keys are a superset of the conventional keyboard with many added capabilities. Use the TOTEBOARD to control computer-based presentations or as a versatile keyboard replacement. Use one TOTEBOARD to run many computers. Use many TOTEBOARDS to address one computer for group participation. The TOTEBOARD is elegantly styled for any executive work area, conference room or classroom.

Features

Features which make the TOTEBOARD Keyboard an excellent choice include:

- Wireless design allows remote control of personal computer.
- Powerful transmitter, sensitive receiver and efficient data encoding overcome distance and directionality problems.
- Comfortable, built-in hand grip for "carry-around" operation.
- Selectable, one-hand operation for convenience or when disabled.
- Small size saves valuable desk space.
- 100 keys, separate numeric and cursor pads.
- Multi-computer control for switching between computer programs.
- Selectable address system for multiple TOTEBOARD environments.
- Turbo rep rate for accelerated key response.

TOTEBOARD

Technical specifications

The TOTEBOARD is a wireless, small-footprint keyboard that works with the following:

- IBM PS/2, AT, XT, PC and compatible computers

Keyboard Layout

100 keys with separate function keys, cursor control, numeric keypad and typewriter areas.

Keyboard Transmission

Infrared transmission allows you to aim the TOTEBOARD in the general direction of the Receiver, instead of directly at the Receiver as required by most infrared devices. The Receiver uses a special data verification technique to understand transmissions from the Keyboard. Connecting the Receiver to the serial port allows use of both the standard keyboard and the TOTEBOARD Keyboard.

Useable Distance

Up to 30 feet between Keyboard and Receiver.



Controls

- Keyboard—Switches for on/off, double auto-repeat rate, multi-computer mode, one-hand operation and Keyboard address.
- Receiver—Switches for either PC, XT, or AT, PS/2 operation, and Receiver address system. The TOTEBOARD Receiver plugs into the computer keyboard port. An optional serial port interface is available for computers without a detachable keyboard.

Receiver-to-PC Connector Cables (one supplied)

- PC keyboard port connection—PC, XT, AT or compatible with DIN-5 connector; PS/2 or compatible with Mini DIN-6 connector.

The TOTEBOARD Keyboard has a built-in grip for one-hand use.

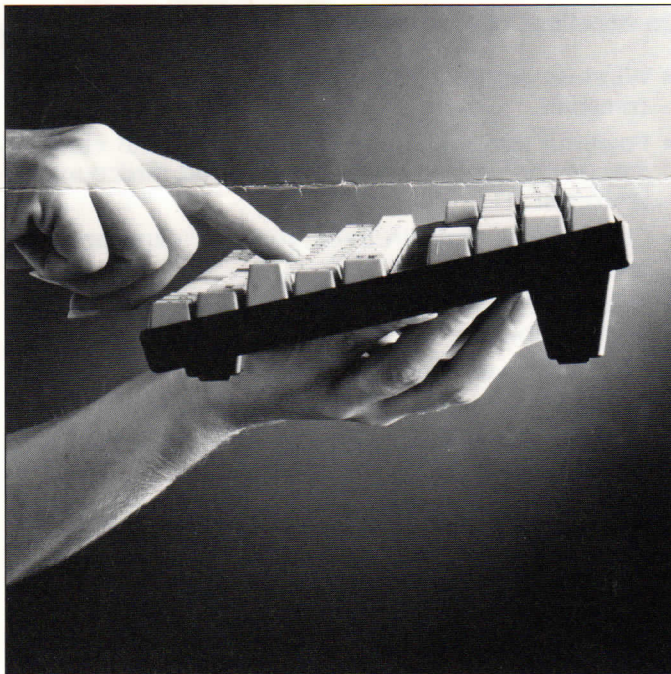

The infrared receiver connects by cable to the keyboard jack or serial port of the computer. It uses a special data verification technique to understand transmissions from the TOTEBOARD. Those transmissions are then relayed to the computer. Connecting the Receiver to the serial port allows use of both the standard keyboard and the TOTEBOARD. It can be used up to 30 feet away from the Receiver, which has selectable switches for use with IBM PS/2, AT, XT, PC and compatible computers.

- PC serial port connection—9 PIN-Serial with DB-9 female connector; 25 PIN-Serial with DB-25 female connector.

Materials

Keyboard: Heavy-duty ABS plastic
Receiver: Aluminum alloy

Dimensions

Keyboard: 10.8 x 6.5 x 2.1 inches
Receiver: 4.3 x 2.5 x 1.2 inches

Weight

Keyboard: 1.4 lbs. (with batteries)
Receiver: .4 lbs. (without cable)

Power Source

Four "AA" batteries (included)
Automatic "sleep" mode ensures battery life for up to one year.

Temperature

Operating: 0°C. to +40°C.; Storage: -20°C. to +50°C.

Humidity

Operating: 10% to 80%; Storage: 10% to 90%

Accessories

Comes with complete instructions and one connector cable, specified upon order (serial port connection cables include a utility diskette). Additional cables and Receivers available from price list.

Warranty

One year limited warranty on parts and labor.



11835 Canon Boulevard
Newport News, Virginia 23606
(804) 873-1354 FAX 804-873-2153

TOTEBOARD and nVIEW are trademarks of nVIEW Corporation. Other brand or product names are trademarks or registered trademarks of their holders. Specifications are subject to change without notice. nVIEW products are manufactured under U.S. Patent #4,763,993 (Foreign Patents Pending).

Distribué par: / Distributed by:
elin
21, Mont Vernon, Ville St-Pierre,
Québec, H8R 1J9
1-800-363-5765 (Canada)
1-800-363-8106 (Ontario)
(514) 483-4641